



## ASSEMBLY INSTRUCTIONS

### Cargo/Touring Trailer-Small or Large

#### Inventory

- Trailer frame
- Tow bar
- Seat post hitch
- Fabric cover
- Fabric bottom
- Safety flag
- Wheel reflectors
- Plastic for bottom fabric
- Rear reflector (or tail light)
- Two quick release wheels, tires, and tubes
- Safety strap
- Hitch nut
- Two red set screws

#### Fabric Bottom

The fabric bottom comes with the plastic floor installed and is fastened to the bottom of the trailer. To complete installation open the Velcro at the front & back .


1. Fasten the fabric over the strut at the front and rear of the trailer, making sure the Velcro lines up.
2. Fasten the top fabric sides over the top sides of the trailer making sure the Velcro lines up.
3. Fasten the Velcro loops along the bottom of the trailer.



#### Wheels

**NOTE:** If you have a braking system, skip this section, go to the separately enclosed Braking System Instructions, and then return to Wheel Reflectors.

On each quick release skewer, unscrew the nut and remove *one* spring. Then slide the skewer through the axle of the hub (center of the wheel). Replace the spring with the smaller end towards the inside, and loosely attach the nut. Set the wheel into the dropouts of the frame with the quick release lever to the outside of the trailer. Make sure the wheels are

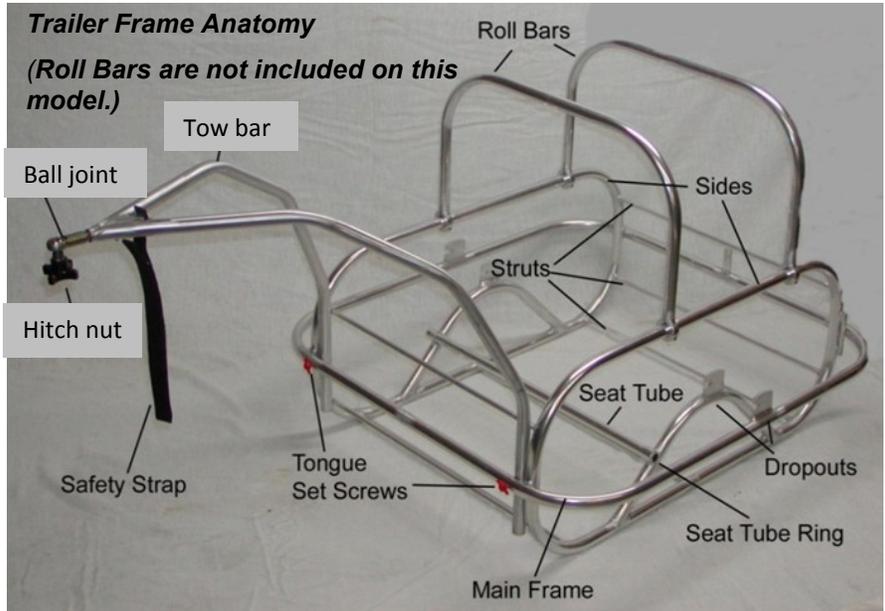

all the way to the back of the drop out. Tighten the nut until the quick release lever can be closed tightly (press lever in, not around in a circle).

The wheels need to be secured firmly into the drop outs.

### Wheel Reflectors

If not pre-installed, install the wheel reflectors into the wheels near the valve but with enough space to add air easily to the tires.

### Tow bar

Insert the *two red set screws* (wing nuts) into the threaded holes in the main frame just far enough to hold them in place. Slide the *tow bar* downwards, between the main frame and the two notched front struts.

There are two grooves in the *tow bar*. Select the grooves that allow your trailer to sit closest to level. Adjust the *tow bar* while you tighten the *red set screws* so that the screw tips fit into the indentations in the front of the tow bar.

When tightened securely, the *tow bar* is pressed firmly against the struts to prevent it from loosening.

### Jogger Stroller

If you are installing the *Jogger wheel*, instead of the tow bar, follow **Jogger Stroller** instructions which are included separately, then return to **Rear Reflector**.

### Seat Post Hitch

Attach the hitch to the seat post with the bevel facing upward at a height which allows the trailer to be as parallel to the ground as possible. Tighten the hitch collar evenly and snugly on both sides.

### Attaching Trailer to Seat Post Hitch

Place the threaded portion of the ball joint through the beveled hole in the hitch. Tighten the hitch nut securely.

### Rear Reflectors, Safety Flag and Safety Strap

Install the reflector to the reflector mount at the back of the trailer. Insert the safety flag into the tube at the left rear of the trailer. Wrap the safety strap around the seat post and attach, keeping it loose enough to avoid binding while cornering. (Not used with Automatic Braking System)

### Fabric Cover

Lay the fabric over the top and attach to all four sides with the Velcro strips. The logo goes towards the rear.

### Owner's Manual

Please read and understand your Owner's Manual.

## Replacement Parts Available at [Cycletote.com](http://Cycletote.com)

Tow bar (tongue)	Bottom fabric	Wheels
Seat post hitch	Top Fabric	Safety flag
Hex key 3/16	Red set screws	Ball joint
Hitch	Hitch Nut	Safety Strap

