



ASSEMBLY INSTRUCTIONS

Jogger Stroller Option (ordered with trailer)

Tools needed:
Small wrench.

Parts

Jogger/Stroller Handle

Red set screws




Front wheel mount

Two detent pins




16" front wheel and tire



Handle Mounts and Handles

Trailers that leave the factory with Jogger/Stroller Options have welded handle mounts on the rear of the trailer. Slide the *handles* over the handle mounts and secure with two detent pins.

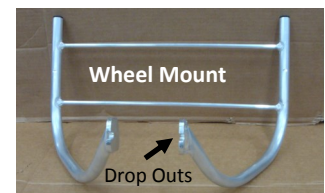

Place washer on the outer side of wheel mount's drop outs

Front Wheel to Wheel Mount

- Loosen the nuts on each side of the *wheel*.
- Attach the *wheel* to the *wheel mount* by sliding the mount's drop outs between the wheel's inner bolt and the outer washer and bolt.
- Fit snugly into the dropouts, then tighten both sides of the *wheel* with a wrench.



Wheel Mount to Trailer


- Remove the tow bar, if attached, from the trailer by loosening the *two set screws* (red wing nuts).
- Slide the wheel mount *upwards* into the same grooves that held the tow bar.
- Tighten the red set screws so that they push snugly against the grooves in the wheel mount.



When tightened, the *wheel mount* should press firmly against the struts. Ensure that the two set screws are tight enough to prevent the wheel mount from becoming loose.

If necessary, align the wheel to allow the trailer to travel in a straight line.

When turning during use, push down on *handle bar* to lift front wheel off the ground.

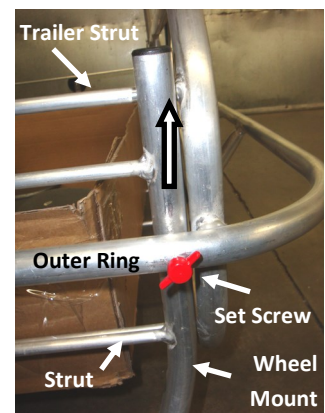

The wheel mount installs between trailer's outer ring and trailer's 2 grooved struts.