


ASSEMBLY INSTRUCTIONS

Landscape Trailer– Deluxe Utility

Inventory Checklist

- Trailer frame with mesh basket
- Shovel rack
- Seat post hitch
- Two quick release wheels and tires
- Two red set screws
- Hitch nut
- Rear reflector
- Two wheel reflectors
- Safety flag
- Hex key
- Tow bar & ball joint
- Safety strap

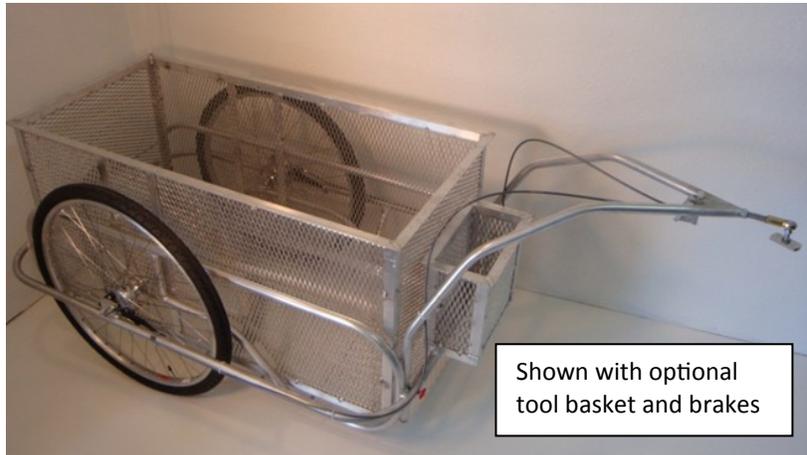

Tools needed: Regular and Phillips screwdriver, small wrench.

Tow Bar

Slide the tow bar downwards, between the main frame and the two notched front struts. Insert the two red set screws (wing nuts) into the threaded holes in the main frame and adjust the tongue while you tighten so that the screw tips fit into the indentations in the front of the tongue. When tightened securely, the tongue is pressed firmly against the struts to prevent it becoming loose.



Wheels

NOTE: If you have a braking system, skip this section, go to the separately enclosed **Braking System Instructions**, and then return to **Wheel Reflectors**.

Unwrap the quick release skewer from the spokes, unscrew the nut and remove one spring. Then slide the skewer through the axle of the hub (center of the wheel). Replace the spring with the smaller end towards the inside, and loosely attach the nut.



Set the wheel into the dropouts of the frame with the quick release lever to the outside of the trailer. Tighten the nut until the quick release lever can be closed tightly (press lever in, not around in a circle).



POWERED BY LIFE!

Wheel Reflectors

Install the wheel reflectors into the wheels near the valve but with enough space to add air easily to the tires.

Mesh Basket and Shovel Rack

The basket is affixed to the trailer, but the shovel rack is removable if needed.

Seat Post Hitch

Attach the hitch to the seat post with the bevel facing upward at a height which allows the trailer to be as parallel to the ground as possible. Tighten the hitch collar evenly on both sides. Place the threaded portion of the ball joint through beveled hole in the hitch. Tighten the hitch nut securely.

Rear Reflectors

Install the reflector to the reflector mount.

Safety Strap

Wrap the safety strap around the seat post and attach, keeping it loose enough to avoid binding while cornering. (*not used with Automatic Braking System*)



Safety Flag

Caution: the flag pole is shipped under tension. Unwrap carefully. Insert the safety flag into the tube at the left rear of the trailer.

Owner's Manual

Please read and understand your Owner's Manual.

Questions

We are happy to help at customerservice@cycletote.com or call us at 800-747-2407.

